


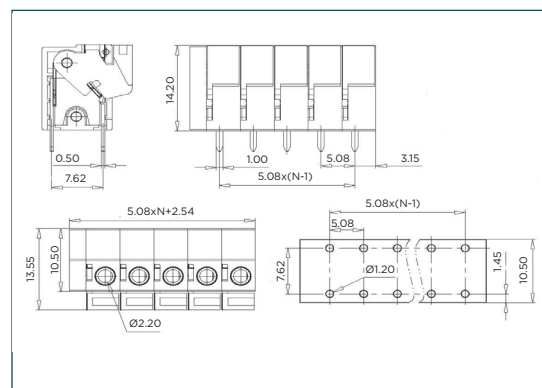
5.08mm screwless terminal blocks

Product overview


- Interlocking modules
- Easily breakable to desired number of poles
- Guided pin alignment
- Choice of vertical or horizontal cable entry
- Moulded in green UL94-V0 PA66
- 0.34-2.5mm² cable (22-14AWG)
-  approved

| SPECIFICATION | |
|------------------------------|------------------|
| Rating | 10A/300V |
| Insulation withstand voltage | AC2500V/1 min |
| Insulation resistance | 500MΩ at DC500V |
| Operating temperature | -40°C to +115°C |
| Moulding | UL94-V0 PA66 |
| Pin/contact | Tin plated brass |
| Recommended PCB hole size | 1.2mm |

| PART NO. | POLES | LENGTH |
|--------------|-------|--------|
| CSTBP508V/2 | 2 | 12.7mm |
| CSTBP508V/3 | 3 | 17.8mm |
| CSTBP508V/4 | 4 | 22.9mm |
| CSTBP508V/5 | 5 | 27.9mm |
| CSTBP508V/6 | 6 | 33.0mm |
| CSTBP508V/7 | 7 | 38.1mm |
| CSTBP508V/8 | 8 | 43.2mm |
| CSTBP508V/9 | 9 | 48.3mm |
| CSTBP508V/10 | 10 | 53.3mm |
| CSTBP508V/11 | 11 | 58.4mm |
| CSTBP508V/12 | 12 | 63.5mm |



| PART NO. | POLES | LENGTH |
|--------------|-------|--------|
| CSTBP508H/2 | 2 | 12.7mm |
| CSTBP508H/3 | 3 | 17.8mm |
| CSTBP508H/4 | 4 | 22.9mm |
| CSTBP508H/5 | 5 | 27.9mm |
| CSTBP508H/6 | 6 | 33.0mm |
| CSTBP508H/7 | 7 | 38.1mm |
| CSTBP508H/8 | 8 | 43.2mm |
| CSTBP508H/9 | 9 | 48.3mm |
| CSTBP508H/10 | 10 | 53.3mm |
| CSTBP508H/11 | 11 | 58.4mm |
| CSTBP508H/12 | 12 | 63.5mm |

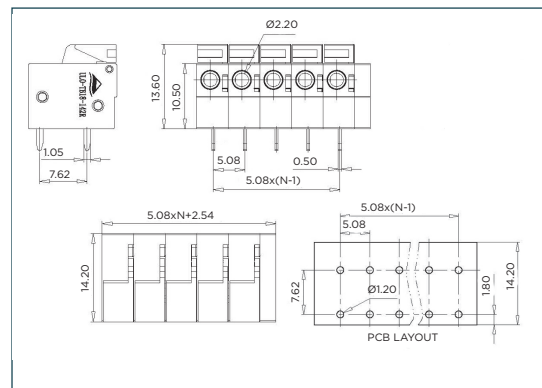

KEY FEATURES

Dual row pins | Vertical or horizontal cable entry | Modular design

